



### 90 DEGREE TYPE 316 STAINLESS WELDED

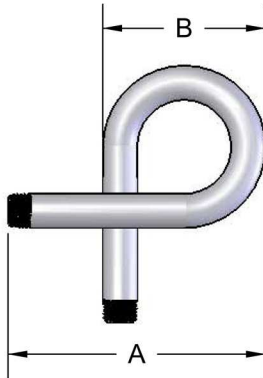


90° & 270° SIPHONS		
	A (±.25")	B (±.25")
¼ NPT	4"	2.5"
½ NPT	6.5"	4"

### 270 DEGREE TYPE 316 STAINLESS WELDED

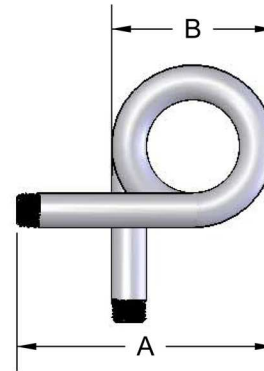


### 180 DEGREE TYPE 316 STAINLESS WELDED

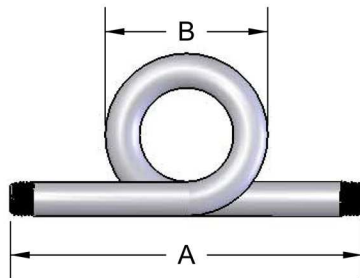

180° & 360° SIPHONS		
	A (±.25")	B (±.25")
¼ NPT	5.5"	2.5"
½ NPT	9"	4"

### 360 DEGREE TYPE 316 STAINLESS WELDED

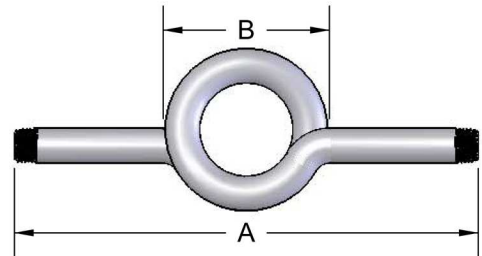

	PRESSURE RATING*
¼" SCH 40	511 PSI @ 500° F
¼" SCH 80	1738 PSI @ 500° F
½" SCH 40	842 PSI @ 500° F
½" SCH 80	1822 PSI @ 500° F

\*These pressure temperature ratings are established on the basis of calculation in accordance with ASME Boiler and Pressure Vessel Code, 1996 Edition, 1995 Agenda, Paragraph PG 27. It is the end user's responsibility to ensure that all components used in the pressure retaining service are adequately designed for the anticipated conditions. Chicago Stainless Equipment, Inc. claims no responsibility for the accuracy of these ratings.

UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN INCHES  TOLERANCES: ± ¼"	DRAWN	NAME <b>MAM</b>	DATE <b>11/11</b>	<b>CHICAGO STAINLESS EQUIPMENT</b>	
	CHECKED	COMMENTS:		<b>INSTA-FLOW PRESSURE GAUGE SIPHON TUBES</b>	
	MATERIAL	<b>316 S.S.</b>		SIZE	DWG. NO.
	FINISH	<b>WROUGHT</b>		<b>A</b>	<b>IS-2011-11-A</b>
DO NOT SCALE DRAWING	SCALE:1:3		WEIGHT: <b>0.42</b>	SHEET 1 OF 1	