



PERIPRO® Peristaltic Pumps

Heavy duty construction for demanding applications

Pumps & Systems

NETZSCH PERIPRO® Peristaltic P

HEAVY DUTY HOSE PUMPS WITH LARGE ROLLERS FOR LONGER SERVICE LIFE

NETZSCH technology for peristaltic pumps

- Excellent resistance to abrasion
- High suction capability
- Insensitive to dry running
- No valves or mechanical seals
- Low shear and reversible pumping
- Full metering control
- Industrial, Chemical and Food versions
- Metering accuracy of $\pm 1\%$
- Up to 70 % solids in conveyed product

Advantages of PERIPRO® pumps

- No need for mechanical seals
- Product only contacts elastomer
- High volumetric efficiency
- Heavy duty large rollers
- Ease of hose replacement

The unlimited dry running and the suction capacity of up to 13.5 psi (9.5 mWc) complement the advantages of the PERIPRO® pumps.

Ideal for complex fluids

- Abrasive products: Lime milk, activated carbon, sludges and slurries, among others
- Corrosive products: Sodium hypochlorite, ferric chloride, hydrochloric acid, etc.
- Viscous products: Water-based glues, greases, creams, resins, etc.
- Delicate products: Latex, polymers and flocculants, food products, etc.

The PERIPRO® peristaltic pumps are available in three different versions: Industrial, Chemical, and Food.


UNMATCHED PUMP LIFE AND EXCELLENT PERFORMANCE

SMALL VOLUME OF LUBRICANT

IDEAL FOR ABRASIVE FLUIDS

LOW SHEAR

INSENSITIVE TO DRY RUNNING

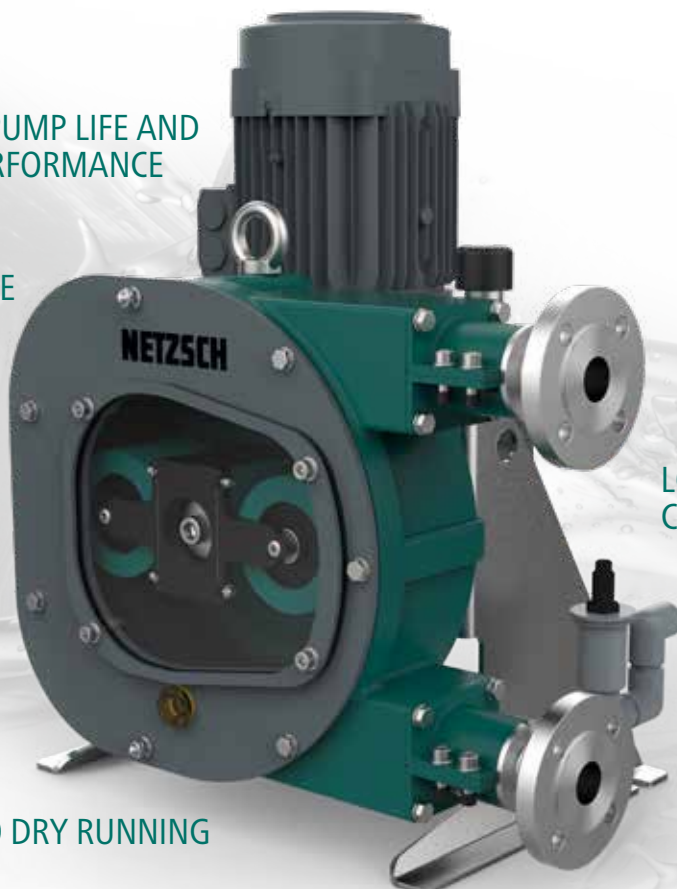

Advantages of PERIPRO® pumps compared with shoe technology

- Energy savings of up to 30 %
- 90 % less lubricant required
- Ease of hose replacement
- Wide range of operation
- Low starting torque eliminates the friction against the hoses

LOWER ENERGY COSTS

VERY FEW WEAR-PARTS

ROBUST PUMP TECHNOLOGY

umps

The Design of the PERIPRO®

1 Latest technology of peristaltic pumps

The materials used are compatible with many products and in many applications. Several options for materials of construction increase the range of application. The performance under abrasion, corrosion and temperature requirements are excellent.

2 Saving on hose consumption and ease of installation

High quality hose with unique manufacturing process: extruded inner layer with high-density textile reinforcement and precisely machined outer layer. Due to controlled tolerances, the hose ensures optimal compression and fast installation.

3 Robust construction to support up to 145 psi / 10 bar

Integrated oversized bearings designed to support radial loads, large metal rollers with oversized bearings, safe and reliable connection system and extremely robust construction materials optimizes the pump for demanding applications.

4 XXL roller technology reduces energy consumption and so increases efficiency

Due to the size of the rollers, the hose is optimally compressed. This leads to more efficiency, low energy consumption and a longer hose life. The starting torque is minimal and the operation simple.



PERIPRO® Pumps for a Wide Range of Flow Applications

For accurate metering, robust and efficient pump flows

The NETZSCH PERIPRO® pump, has a compact, vertical design with a hose compression system with XXL rollers. This hose compression system with maximum surface contact, together with a differentiated and technically advanced manufacturing process, maximizes service life and minimizes maintenance and operating costs.

The robustness of the pumps is based on a compact and a simple mounting system as well as on

the unique design and precision of the component's construction materials that are protected against corrosion and hardened to support extra loads.

- The NETZSCH PERIPRO® does not require valves nor mechanical seals.
- Hose material: NR, EPDM, NBR (FDA approved) & Hypalon®
- Connections: AISI 316 Stainless Steel, PP, PVDF (PTFE)




NETZSCH - PERIPRO® Peristaltic Pumps

Model	Max. Flowrate (continuous)		Max. Temperature max.		Discharge pressure (max.)		Capacity	
	approx. gph	approx. l/h			psi	bar	gal/rev	l/rev
10/0.1	54	200	176 °F	80 °C	145	10	0.011	0.043
10/0.3	137	520	176 °F	80 °C	145	10	0.029	0.109
10/0.7	290	1,100	176 °F	80 °C	145	10	0.059	0.227
10/1.4	500	1,900	176 °F	80 °C	145	10	0.124	0.47
10/2.7	1,000	3,700	176 °F	80 °C	145	10	0.235	0.89
10/5.1	1,850	7,000	176 °F	80 °C	145	10	0.446	1.69
10/11.1	3,500	13,300	176 °F	80 °C	145	10	0.98	3.71
10/23.7	6,200	23,700	176 °F	80 °C	145	10	2.08	7.9
10/40.5**	7,500	28,500	176 °F	80 °C	145	10	3.55	13.5
10/60.0	9,500	36,000	176 °F	80 °C	145	10	5.25	20

*Depending on the driver, dimensions could change.

**Size scheduled for release in September 2024

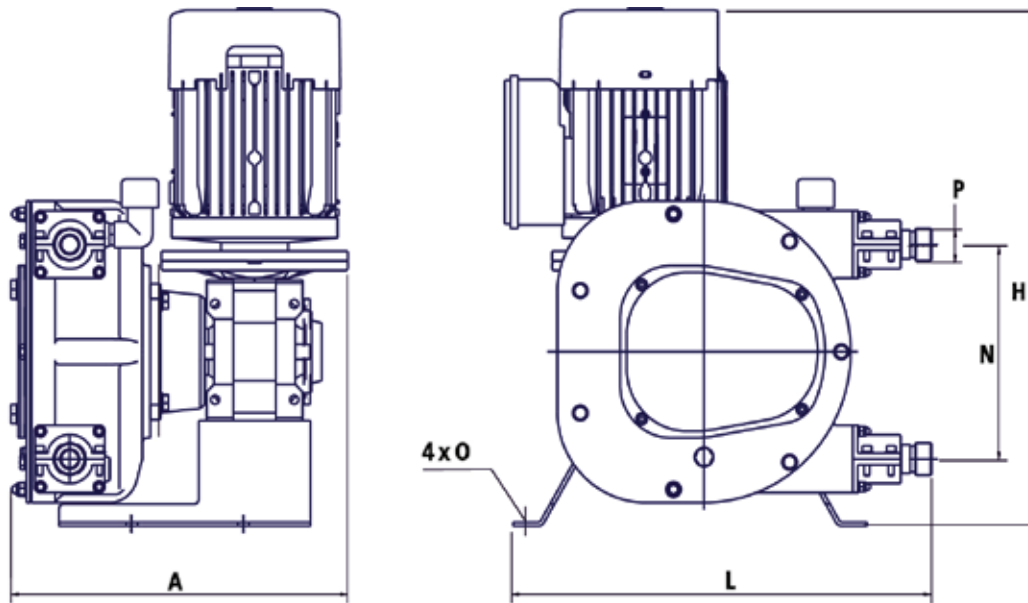

Inner Hose Diameter		A		H		L		N		P ANSI Flange connections
in	mm	in	mm	in	mm	in	mm	in	mm	
0.51	13	9.46	240.3	14.44	367	12.01	305	4.57	116	1/2"
0.63	16	11.5	292.1	17.18	436.5	14.86	377.6	7.68	195	3/4"
0.87	22	14.2	360.6	19.21	488	17.7	449.5	8.82	224	1"
1.1	28	15.05	382.3	24.68	627	20.35	517	10.39	264	1"
1.38	35	16.08	408.6	26.65	677	22.95	583	12.99	330	1-1/4"
1.69	43	31.52	800.6	25.79	655	27.56	700	16.93	430	1-1/2"
2.16	55	37.29	947.1	32.28	820	32.28	820	21.81	554	2"
2.75	70	37.68	957	42.09	1069	41.97	1066	29.37	746	2-1/2"
3.35	85	42.52	1080	48.7	1237	49.7	1263	34.49	876	3"
4	100	53.15	1350	56.3	1430	58.43	1484	41.02	1042	4"

Application

THE BEST SOLUTION IN MANY INDU

The PERIPRO® peristaltic pumps optimized design provides metering, an important advantage in applications in many markets. This pump handles product with high solids content, abrasive materials, product that must not be contaminated, corrosive product and more. The pump components are durable and easy to replace.

Water Treatment

- Pumping or conveying of sludges and slurries
- Metering of
 - activated carbon
 - lime milk
 - sodium hypochlorite
 - ferric chloride (FeCl_3)
 - polymers
 - flocculants
- Sampling



Food, Beverage and Cosmetic Industries

- Pumping of diatomaceous earth
- Transfer of viscous juices and sauces or with solid pieces in the mixture
- Various additives, colorings and flavorings for food
- Feeding to filling machine



The Mining Industry

- Transfer of mineral slurries
- Metering of cyanide and xanthate
- Transfer or metering of polymers
- Metering of reagents



STRIES

Chemical Industry

- Metering of
 - pigments and water-based paints
 - resins
 - detergents
 - creams
 - water-based glues
 - all types of acid
 - base corrosive chemicals
- Transfer of highly abrasive products such as titanium dioxide



Ceramics and Construction


- Metering of very abrasive products such as barium carbonate and potassium permanganate
- Transfer of ceramic slurries
- Metering of additives and colorings for the cement
- Transfer of low density cement



Paper Industry

- Metering of chemicals and paint
- Transfer of paper pulp
- Metering of lime milk
- Metering of additives and colorings
- Metering and transfer of glues





The NETZSCH Group is an owner-managed, international technology company with headquarters in Germany. The Business Units Analyzing & Testing, Grinding & Dispersing and Pumps & Systems represent customized solutions at the highest level. More than 4,600 employees in 36 countries and a worldwide sales and service network ensure customer proximity and competent service.

Our performance standards are high. We promise our customers Proven Excellence – exceptional performance in everything we do, proven time and again since 1873.


The NETZSCH Business Unit Pumps & Systems offers NEMO® progressing cavity pumps, TORNADO® rotary lobe pumps, NOTOS® screw pumps, PERIPRO® peristaltic pumps, macerators/grinders, metering technology and equipment custom built for challenging solutions for different applications globally.

Proven Excellence.

NETZSCH Pumps USA
119 Pickering Way
EXTON, PA 19341
Tel.: 610 363-8010
Fax: 610 363-0971
npa@netzsch.com

NETZSCH Pumps USA
1511 FM 1960 Road
Houston, TX 77073
Tel.: 346 445-2400
npa@netzsch.com

NETZSCH Canada, Incorporated
500 Welham Road
Barrie, ON L4N 8Z7
Canada
Tel.: 705 797-8426
Fax: 705 797-8427
ntc@netzsch.com



CENTREX
TECHNICAL SALES

3633 Century Blvd Ste #2 Lakeland, FL 33811 2558 Turkey Creek Rd, Oilville, Rd. 23129
4000 Jefferson Park Rd, Powhatan, Va. 23139

844-544-1706

NETZSCH®

pumps-systems.netzsch.com